



Quick Access Inspection Doors

Non-Pressure Rated Applications


Ideal for Conveyors, Legs, Spouting, and Tanks

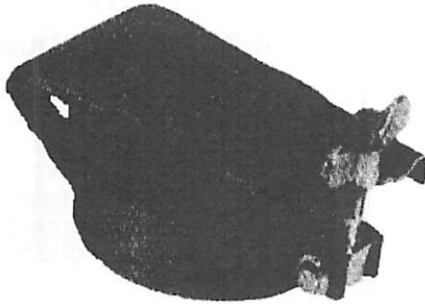

6 Inch Dia = LH Series
8 Inch Dia = LW Series

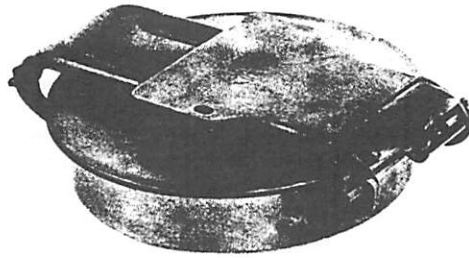

8 Inch Dia = LA Series
10 Inch Dia = LB Series
12 Inch Dia = LS Series
16 Inch Dia = LD Series
20 Inch Dia = LE Series

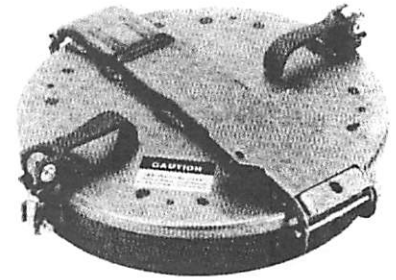

24 Inch Dia = KN Series
30 Inch Dia = LT Series - Not Pictured *
* Similar to KN except 9 cams and no crossover arm

Material Options: Carbon Steel, SS304, SS316, SS316L

Gasket Options: Black Buna N, EPDM, Teflon, Hi-Temperature, Teflon, White Neoprene

* Options not available for all sizes

FEATURES:

Easy Opening Cover	No Tools Required to Open
Lockable Latch	Easy to Install
Low Initial Cost	Low Maintenance Cost

Pressure-Rated Applications


Inch Dia	Series	Max PSI	Cam Levers
16	LF	5 psi	3
16	LG	12 psi	4
20	KS	12 psi	6
20	MJ	18 psi	6
20	LM	25 psi	6
20	MZ	25 psi	6
24	KY	18 psi	9

Material Options:


Aluminum, Carbon Steel, SS304, SS316

Gasket Options:


Buna N, White Neoprene, Viton, Teflon, Hi-Temp, EPDM

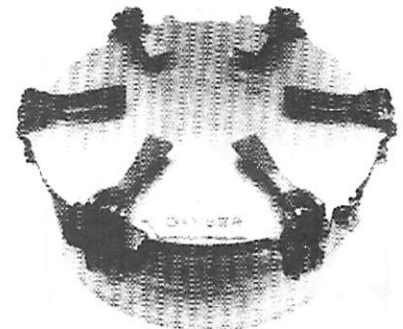


Pressure and Vacuum Relieving Tank Hatch

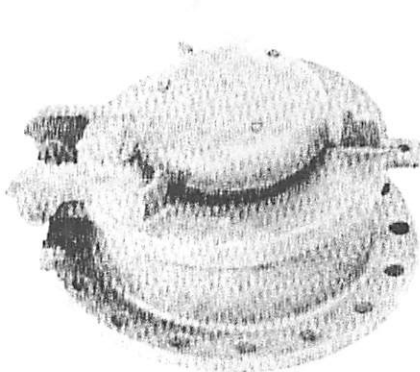

8 Inch Dia = HA Series
1.5 oz Pressure x 0.5 oz Vacuum

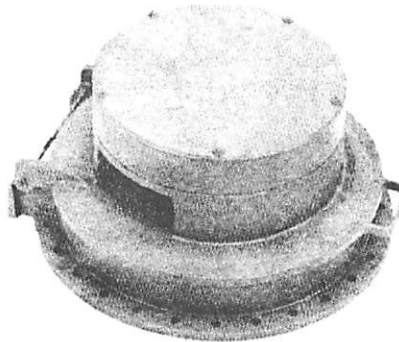

20 Inch Dia = HC Series
Cast Aluminum w/ Flanged Base
Pressure Settings of: 1, 2, 4, 5, 6 oz.
Vacuum Setting of 0.5 oz/sq. in.

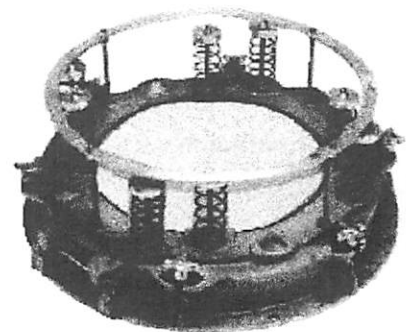

HH Shown with Cover Removed

24 Inch Dia = HH Series
All Aluminum Construction
Pressure Setting of 2 to 16 oz/sq in
Vacuum Setting of 0.5 oz/sq. in.



1.800 KC SUPPLY (527.8775)
www.kcsupply.com

Phone 816.753.7676
email: kcsupply@kcsupply.com

Fax 816.753.0444