



Portable Non-Contact Thermometers

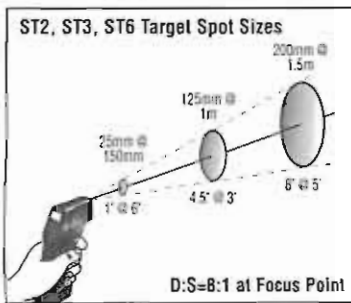

- Safely measure hot, hazardous or hard-to-reach materials
- Measure up-close or from a distance
- Handheld, battery powered thermometers
- Detect and troubleshoot electrical and maintenance problems
- Lightweight, compact, and easy-to-use
- Use on electrical panels, bearings, motors and more applications
- Infrared laser used for sighting
- LCD Backlit Display and holds display for 7 seconds
- Reads in Celsius or Fahrenheit



Model	MT4	ST2	ST3	ST8
Temp Range	0 to 500 F	-25 to 750 F	-32 to 750 F	-25 to 1000 F
Accuracy*	±2% or ± 3.5 F	±1% or ± 2 F	±1% or ± 2 F	±1% or ± 2 F
Laser Sights	No	No	Yes	Yes
Temperature Reading	Current	Current & Max	Current & Max	Current, Max, Min, Avg., Dif
Distance to Spot	6:1	8:1	8:1	30:1
Carrying Case	No	No	Yes	Yes

*Note: Accuracy based on 73 F ambient operating temperature. Colder climates decrease accuracy up to ±5 F at -25 F.

Stroboscope



Our stroboscopes are highly stable, industrial-quality instruments for non-contact RPM measurement as well as inspection and observation of moving parts by “freezing” or “slowing down” the action.

- AC or rechargeable battery-powered models
- Digital Display is 5-digit LED, 8 mm high
- Flash Range of 40 to 12,500 FPM
- Instantly change to 2X (double) or 1/2 (half) flash rate selection with press of button
- Tube Life of 100 million flashes
- Battery operating time of 1 hour
- DT-725 = Battery-Powered
- DT-721 = AC-Powered

Electrical Components


Voltage Indicators



No. 38880. AC Detective™ voltage detector detects AC voltage with audible and visual indicators. Does not need to touch live circuits. Two AAA batteries included; easily replaced. Pocket size.

No. 2010. AC voltage sensed without contact. Shows differences between hot and neutral conductors. Features audible and visual indicators, adjustable sensitivity. Base-located indicator viewable with overhead use.

No. 1010 Pocket Volt-Tick Voltage Testers



Does not have to contact live circuits to sense voltage. Can be carried in pocket, 5/4" long. 50-500 VAC range. Audible and visual indicators; on-off switch is pocket clip. Included are 2 No. 357 calculator or watch batteries.

Digital Thermometers



Data-hold function on digital LCD temperature display. Shows Fahrenheit and Centigrade ranges. Probes sold separately but necessary to operate unit.

No. 93-1062, Digital Thermometer
No. 5791, Clamp-On Probe

Voltage & Continuity Testers



Automatic range selection in AC/DC voltage measurement. One probe identifies the hot side; light and buzzer indicator. A protective resistor breaks current in case of contact over 700 volts. Test resistance to 300K ohms. Two AA batteries included.

No. 6708. Measures voltage: 6, 12, 24, 50, 115, 240 and 440.

No. 6706. Measures voltage: 12, 48, 120, 208, 277, 480 and 600.

No. 6710. Measures voltage: 7-660.

Vapor—Tight Light Fixtures




Fixture Cap With Receptacle VFC



Splice Box VIX



Globe VCG



Guard VAG

Mill Type Lamp Bulb

This sturdily constructed bulb will last many more hours than the ordinary bulb. The filament is extra strong to withstand constant vibration and use. Inside frosted.

Combination Digital Tachometer



Contact AND Non-Contact measuring capabilities handle all your RPM, surface speed and length measuring needs with ONE GAUGE.

- 5-digit LCD, 10 mm high Display
- Easily converts from non-contact to contact mode with a rugged slide-in adapter
- Non-contact sensing from up to 14" with visible red light and small reflective tape
- Measure RPM, Surface Speed and Length
- RPM from 1.0 up to 99,999 (non-contact)
- Surface Speed = Feet, meters or inches/minute
- Length = feet, meter, inches
- Built-in memory stores maximum, minimum and last reading recall to the display
- Rugged lightweight design
- Automatically shuts off after 30 seconds of non-use
- 20 Hour continuous use for battery life
- Complete Kit : tachometer, slide-in contact adapter, surface speed wheel with tip adapter, cone tip adapter, reflective tape, two AA batteries and carrying case
- 2-year warranty
- NIST Certification included



1.800 KC SUPPLY (527.8775)
www.kcsupply.com

Phone 816.753.7676
email: kcsupply@kcsupply.com


Fax 816.753.0444

151

Federal Model 350/450 Vibratone® Horns

for general alarm and routine signaling uses

- Effective up to a radius of 200 feet.
- Adaptable to a variety of mounting choices.
- Single and double projectors available.
- For coded or sustained tones.

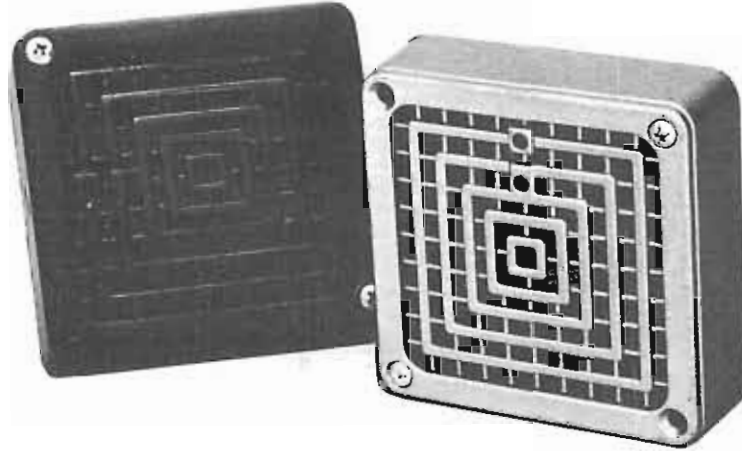

Description

Model 350 (AC) and Model 450 (DC) Vibratone® horns produce sound by electro-mechanical vibration of a diaphragm. The horn mechanism (power plant assembly) with diaphragm is attached to the grille. Interior or exterior use depends on the box used. Both horns may be fitted with single (PR) or double (PR2) projectors.

Features

Model 350 is available in standard AC voltages for 60 hertz—6, 12, 24, 120 or 240 volts. Its sound output level is 100 dB minimum at ten feet (94 dB on six volts). Model 450 is available in standard DC voltages—6, 12, 24, 48, 125, 250 and 300, the latter excellent for coding and alarm; it is rated at 99 dB minimum at ten feet. Both models have volume control.

Made for surface, flush or semi-flush mounting on walls, panels, in cabinets, or on 4" square outlet boxes (not included with signal). Provision is made for connecting to 1/2" conduit when used with various accessories. Made of die-cast zinc with gray hammertone enamel finish (red available on request). Size: 4" x 4" x 2-1/2". Grille openings are small to resist vandalism without reducing sound output. Model 350 has a stainless steel diaphragm; model 450 an aluminum-alloy diaphragm and heavy-duty contacts. Built to withstand high temperatures; UL-, FM- and CSA-approved. 250 volts DC is the maximum voltage approved by FM.

Applications

Capable of producing coded blasts or sustained tones, Federal Vibratone® horns are excellent for general alarm, start/dismissal, coded paging and process control signaling in areas where their sound output exceeds ambient noise levels. Compact size and installation options make them ideal for institutional use as well.

Applications



Horn + NB



Horn + WB



Horn + SF + NB



Horn + NB + CC



FG + Horn + FB



WB + Horn + PR



NB + Horn + PR2

Explosion-proof

MODEL 41X



- 31X Horn, grille type, vibrating, explosion proof, 120VAC ..
- 41X Horn, same as 31X but DC, 24VDC

FALCON EMERGENCY ALARM STATION

Highly Visible Safety-Yellow Wall-Box System



- Perfect for low cost protection.
- 20 gauge safety-yellow steel wall box is easy to locate and relocate wherever you need it.
- Wall mounted with two screws.
- Padlock and key system provides romper resistance.
- Emergency handle assures immediate access to horn.

Model # TAD4N (complete station)
 Model # TAB (replacement box only)
 Refill # SSNR
 Model # TAR 3 pk replacement rods

FALCON MIGHTY SONIC™

The Lightweight, Portable, Long-Lasting Safety Horn



- Quality built for long-lasting reliability.
- Independent of any other power source.
- Delivers a piercing 120 dB blast or 10 feet.
- Convenient push-button operation.
- Durable, high-impact trumper is unbreakable.

Model # MSN

Refill # MSNR

FALCON SUPER SONIC™

The Trigger-Activated All-Metal Safety Horn



- Built for endurance and lasting power.
- All metal horns in bright red or chrome plating.
- Quick trigger operation.
- Replaceable canister delivers 120 dB blasts or 10 feet.

Model # SSCN (Chrome)

Refill # SSNR

Model # SSN (Red)

FALCON SAFETY SHOWER HORN

Signaling Systems For Every Emergency Shower Configuration



- Instant signaling in any emergency drench shower - vertical, horizontal or floor mounted.
- Chain connects to shower. When pulled, a loud blast is emitted the instant the shower is activated.
- No wires, batteries or other power source required.
- Piercing blast of 120 dB or 10 feet.

Note: Not recommended for use at temperatures below 32° F (1° C).

Model # SSAIN (vertical-mounted showers)
 Model # SSA2N (horizontal- and floor-mounted showers)
 Refill # SSNR

SOUND 911 HORN

Great Personal Protection



- Carried on its own clip for belt or bag.
- Delivers two-second blasts of 112 dB or 10 feet.
- No wires or batteries required.

Model # 911 (boxed)
 # 911C (carded)
 Refill # 9112R (2 pk)