



# Dust Suppression Oil Systems

## Dustop Series

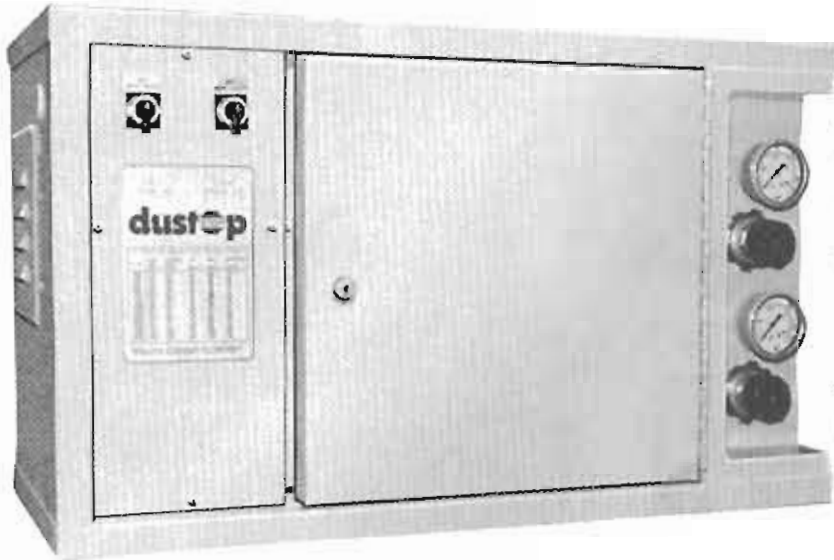

- ACCURATE CONTROL
- LOW COST
- SAVINGS ON SHRINK
- REDUCES ENERGY COSTS
- MINIMIZES USE OF MECHANICAL DUST COLLECTING EQUIPMENT
- REDUCES AIRBORNE DUST
- LABOR SAVINGS
- LOWER HOUSEKEEPING COSTS
- POSSIBLE INSURANCE PREMIUM REDUCTION
- INCREASED SAFETY
- REDUCES EPA COMPLAINTS

General Layout

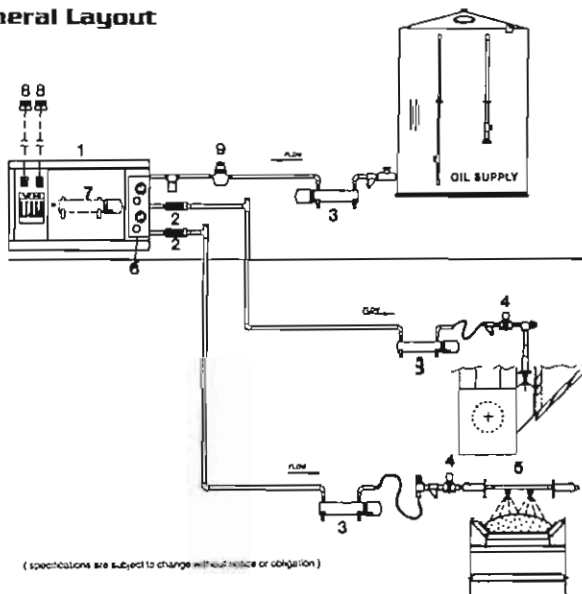

(specifications are subject to change without notice or obligation)

### Optional Accessories

- 2. Mechanical Flow Meter
- 3. In-Line Heaters
- 4. Solenoids
- 5. Spray Assemblies
- 6. Second Point
  - Nozzle Pressure Regulator
  - Nozzle Pressure Gauge
  - Spray Nozzle Assembly
  - Factory Mounting
- 7. Internal Tank Heaters
- 8. Auto Control Switches
- 9. Accumulating Meters
  - Heat Tape and Accessories
  - Remote Monitoring Stations
  - Mineral Oil (Barrel or Bulk)
  - Electronic Flow Meter

### Standard Components (1):

- 1/2 HP Motor, 115V, 6A, TEFC
- 2.8 GPM Gear Pump
- System Relief Valve
- System Pressure Gauge
- Nozzle Pressure Regulator
- Nozzle Pressure Gauge
- Suction Line Filter
- Manual / Auto Control Switch
- Heater Control Switches
- Electrical Termination Box
- Spray Nozzle Assembly
- Premounted Tank for Heater
- Lockable Enclosures

Dimensions 30" W x 18" H x 13" D

Other Models Available including the Oiltrol I and the portable Oiltrol II

These models are similar to above but can have 8 spray points with the same original pump.